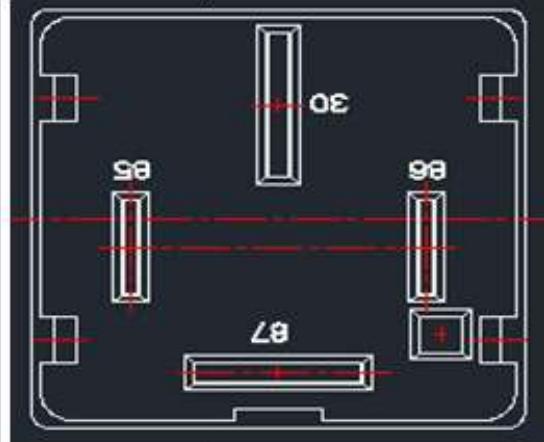
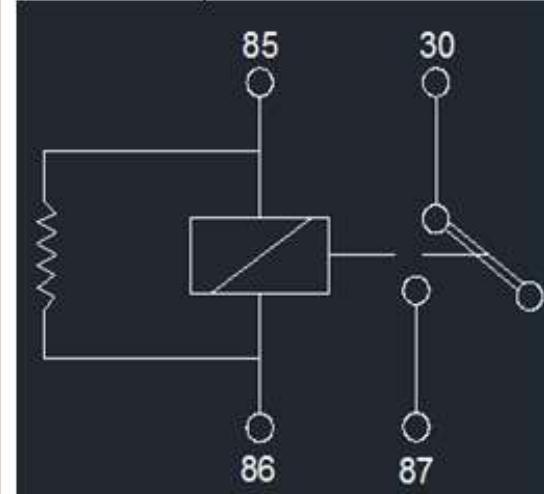


| REPL Part Number | | 7091-1A-12-00 |
|-----------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------|
| Dimension | (L X B X H) | 28 x 28 x 42.5 |
| Weight | Gms | 35 |
| Configuration | | 1 Form A With Parallel Resistor (680Ω) |
| Rating & Current | Amps | NO : 70A At 12 VDC |
| Coil Data | | |
| Max. Operate Voltage | VDC | 8 |
| Min. Release Voltage | VDC | 1.2 |
| Bare Coil Resistance ± 10% @ 25°C | Ω | 90 |
| General Data | | |
| Life Operations - Mechanical | | 1 X 10,00,000 |
| Life Operations - Electrical | | 1 x 1,00,000 |
| IP Protection | | IP54 |
| Speciality | | None |
| Di-electric Strength | | |
| Between Open Contacts | Vms | 500 |
| Between Coil to Contacts | Vms | 500 |
| Insulation Resistance @ 500 VDC | Mega Ω | 10 |
| Layout |  | |
| Internal Wiring Diagram |  | |